




# Roller chain 20B-2 Straight side plates - ELITE

Part no.: 81012533 Packaging Unit: 5m

Brand: ELITE

Model: Straight side plates



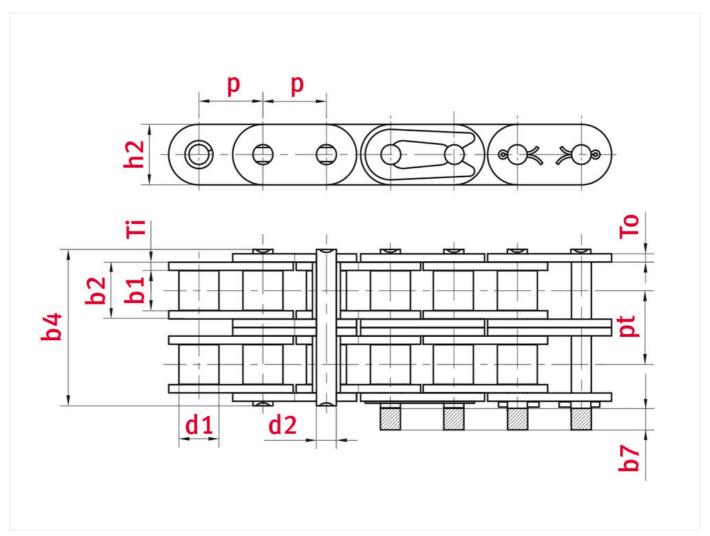

## Technical data

| ROLLER CHAIN                            | 20B   |
|---|-------|
| Pitch p (mm)                            | 31,75 |
| Width between inner plates b1 min. (mm) | 19,56 |
| Roller diameter d1 max. (mm)            | 19,05 |

www.iwis.com 1

## Product data



| Pin diameter d2 max. (mm)                        | 10,19     |
|--|-----------|
| Pin length b4 max. (mm)                          | 79,7      |
| Max. add. length of connecting link b7 max. (mm) | 6,1       |
| Total width inner link b2 max. (mm)              | 29,01     |
| Plate thickness Ti/To (mm)                       | 4,50/3,50 |
| Height inner plate h2 max. (mm) (JWIS: g)        | 26,42     |
| Min. tensile strength ISO/DIN FU (kN)            | 170       |
| Weight per meter (kg)                            | 8,23      |
| Bearing surface f (cm²)                          | 5,91      |
| Traverse pitch pt (mm) (JWIS: e)                 | 36,45     |

## **Product Information**

ELITE roller chains have a high wear resistance and significantly higher fatigue strength than the standard requires. The right choice for industrial applications: robust and reliable. All ELITE transmission roller chains are highly pre-tensioned and treated with our special additive chain oil eliDUR+, a high-tech initial lubricant. Non-drip eliDUR+ offers not only the added advantage of improved running characteristics, but also provides better corrosion protection.

#### **ELITE** highlights:

- Approx. 40% higher breaking strength is applied to pre-stretch our chains by 10% more than required by standard ISO 606
- · Initial lubrication with eliDUR+ ensures extremely high wear resistance
- · Low run-in elongation
- Tensile strength on average 20% higher than required by standard ISO 606
- ELITE pins have a smooth, extra- hard surface for increased wear resistance
- Operating temperature range with eliDUR+ standard lubrication: -5 °C to +70 °C
- · All versions also available in coated form
- · If required, we can deliver your chains ready-made to the desired length
- Special lubricants for low temperatures down to -30 °C or high temperature applications up to +250 °C available on request
- · On request, iwis delivers chains pair-matched or set-matched and marked

# **Applications**

- · Warehouse technology, materials-handling industry
- Conveyor technology
- · Assembly and industrial handling systems
- Wood processing industry

www.iwis.com 2



#### **REQUEST DIRECTLY ONLINE NOW**

https://www.iwis.com/en-en/products-services/roller-chain-20b-2-straight-side-plates-elite~p3343

## Useful information

#### **CALCULATION PROGRAM**

InduKet: the Chain Drive Calculation Program for Engineers.

iwis.com/chaincalc

#### **CHAIN CALCULATION**

The right drive solution for your challenge.

chaindrive@iwis.com

#### **SERVICES**

ChainFinder, CAD data, iwis Chain Handbook and more.

iwis.com/services

www.iwis.com 3