




Accumulation chain 2030-1 steelconveyor roller double Speed with finger and parts protection - ELITE

Part no.: I1383d36e32f7 Packaging Unit: 5m

Brand: ELITE

Model: steel-conveyor roller double Speed with finger and parts protection



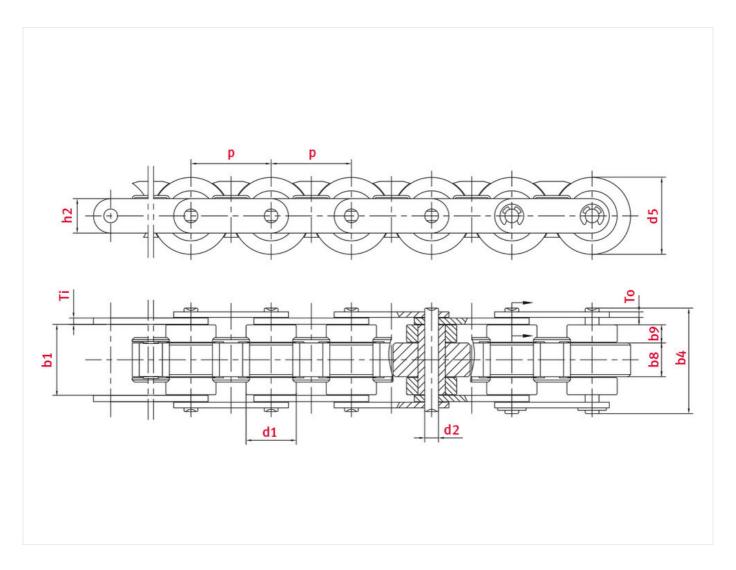

Technical data

ACCUMULATION CHAIN	2030
Pitch p (mm)	19,05
Width between inner plates b1 min. (mm)	16

www.iwis.com

Product data



Roller diameter d1 max. (mm)	11,91
Pin diameter d2 max. (mm)	3,28
Pin length b4 max. (mm)	24
Width of outer roller b9 (mm)	4
Conveyer roller diameter d5 (mm) (JWIS: D)	18,3
Width over conveyer roller b8 (mm) (JWIS: b)	8
Plate thickness Ti/To (mm)	1,5 / 1,3
Height inner plate h2 max. (mm) (JWIS: g)	8,2
Weight per meter (kg)	1,1025
Bearing surface f (cm²)	0.52
Max. chain load (N)	8,9

Product Information

Double Speed chains work on a different principle from accumulation chains; rather than accumulation resulting from an idling transport roller, the transport roller is deliberately turned on the guide. Turning the roller doubles the conveying speed, which means faster movement of goods and materials in the competitive world of modern industrial manufacturing. With the new accumulation chain version, fitted with the 100% protective tab between the accumulation rollers, covering the gap in the inner link area. This feature offers 100% protection against particles falling through the gap, leading to jamming of the accumulation rollers; it also prevents the risk of fingers accidentally getting "caught" in that area.

Advantages

- 100% cover protection without effecting the articulation of the chain through the drive
- · No possibility of clips coming loose and falling into the system, due to the unique patented design
- · Stabile execution of the clip
- · No jamming of the chain through the drive
- · The clip causes no accumulation roller wear
- · Self-adjusting clip after articulation through the drive
- No abrasion or wear caused to the product or pallet transported
- Protective grid prevents foreign objects from falling between the rollers and causing large-area wear.
- Electrically condúctive plastic components

Applications

- Automotive industry
- · Warehouse technology, materials-handling industry
- · Conveyor technology

www.iwis.com 2



• Electronics industry and PCB manufacture

REQUEST DIRECTLY ONLINE NOW

https://www.iwis.com/en-en/products-services/accumulation-chain-2030-1-steel-conveyor-roller-double-speed-with-finger-and-parts-protection-elite~p4018

Useful information

CALCULATION PROGRAM

InduKet: the Chain Drive Calculation Program for Engineers.

iwis.com/chaincalc

_

CHAIN CALCULATION

The right drive solution for your challenge.

chaindrive@iwis.com

SERVICES

ChainFinder, CAD data, iwis Chain Handbook and more.

iwis.com/services

www.iwis.com 3