


Accumulation chain 12B Side bow - JWIS

Part no.: I57fb1ff10f80

Brand: JWIS

Model: Side bow

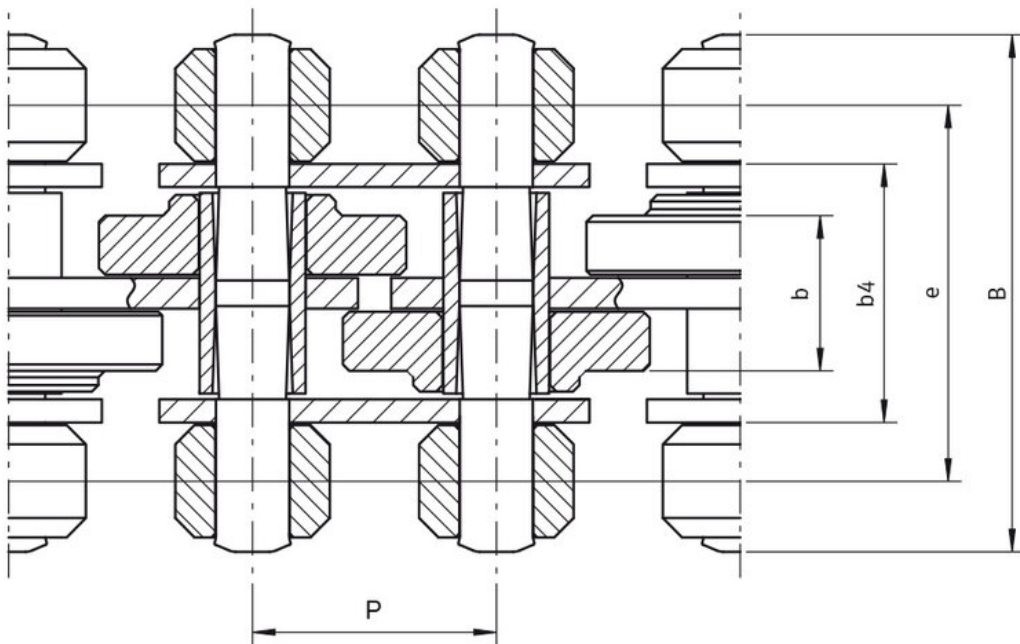

Technical data

ACCUMULATION CHAIN	12B
Pitch p (mm)	19,05
Width between inner plates b1 min. (mm)	20,10
Roller diameter d1 max. (mm)	2,8

Pin length b4 max. (mm)	40
Width over outer plates b5 max. (mm) (JWIS: b4)	24,0 / 26,0 / 27,0 /
Conveyer roller diameter d5 (mm) (JWIS: D)	15
Width over conveyer roller b8 (mm) (JWIS: b)	11,7
Traverse pitch pt (mm) (JWIS: e)	29

Product Information

Side Bow Accumulation Chains are ideal for conveyor systems with extremely small curve radii. iwis Side bow accumulation chain with offset rollers: The modular solution for direction changes in conveyor systems with extremely tight bend radii (> 350 mm). Optimum load distribution as transported material lies flat on links 2 even in bends, thus reducing chain wear.

Applications

- Warehouse technology, materials-handling industry
- Electronics industry and PCB manufacture
- Conveyor technology
- Packaging industry
- Food processing industry
- Glass, ceramic and building material industry
- Pharmaceutical industry, medical technology



REQUEST DIRECTLY ONLINE NOW

<https://www.iwis.com/en-en/products-services/accumulation-chain-12b-side-bow-jwis~p4945>

Useful information



CALCULATION PROGRAM

InduKet: the Chain Drive
Calculation Program for
Engineers.

[**iwis.com/chaincalc**](https://www.iwis.com/chaincalc)



CHAIN CALCULATION

The right drive solution for your
challenge.

[**chaindrive@iwis.com**](mailto:chaindrive@iwis.com)



SERVICES

ChainFinder, CAD data, iwis
Chain Handbook and more.

[**iwis.com/services**](https://www.iwis.com/services)