




# Conveyor chain M224 Bush conveyor chain M series - ELITE

Part no.: I548aec642c3e

Brand: ELITE

Model: Bush conveyor chain M series



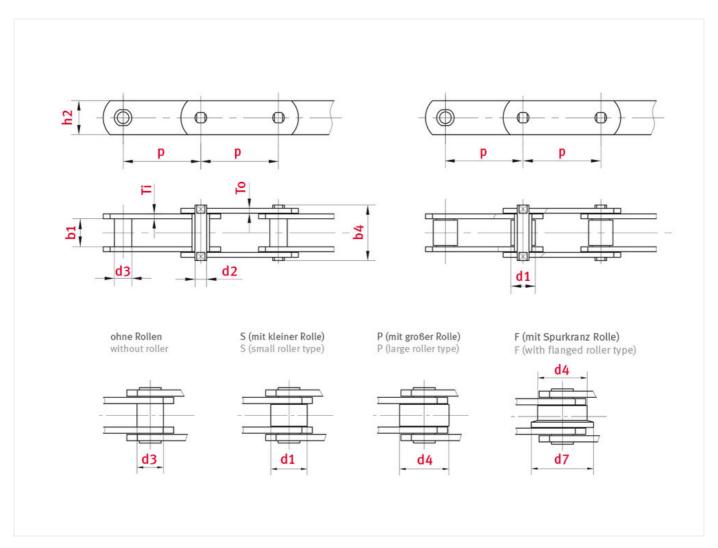

## Technical data

ROLLER CHAIN	M224
Pitch p (mm)	400
Width between inner plates b1 min. (mm)	43
Roller diameter d1 max. (mm)	42

www.iwis.com 1

## Product data



Pin diameter d2 max. (mm)	21
Bush diameter d3 max. (mm)	30
Pin length b4 max. (mm)	98
Roller diameter large roller d4 max. (mm)	85
Flanged roller diameter d7 (mm)	100
Plate thickness Ti/To (mm)	8
Height inner plate h2 max. (mm) (JWIS: g)	60
Min. tensile strength ISO/DIN FU (kN)	224
Bearing surface f (cm²)	12.39

## **Product Information**

In the context of the ELITE conveyor chain range, iwis supplies a wide variety of chains according to standards DIN 8165 and DIN 8167, as well as models manufactured according to British Standard with dimensions in inches, and highly diverse special versions. Bush conveyor chains are often used for conveying tasks involving long transport distances at relatively low speeds.

#### **ELITE** highlights

- · Pins usually made of heat-treated alloy steel, induction-hardened or tempered
- Bushes made from seamless precision steel tube, case-hardened
- · Link plates made of high-strength tempered steel
- Rollers (where present) made of case-hardened steel, case-hardened

# **Applications**

- · Wood processing industry
- · Steelmaking industry
- · Automotive industry
- · Bulk goods transport
- · Environmental technology, Recycling

#### **REQUEST DIRECTLY ONLINE NOW**

https://www.iwis.com/en-en/products-services/conveyor-chain-m224-bush-conveyor-chain-m-series-elite~p4245

www.iwis.com 2



## **Useful** information

#### **CALCULATION PROGRAM**

InduKet: the Chain Drive Calculation Program for Engineers.

iwis.com/chaincalc

#### **CHAIN CALCULATION**

The right drive solution for your challenge.

chaindrive@iwis.com

#### **SERVICES**

ChainFinder, CAD data, iwis Chain Handbook and more.

iwis.com/services

www.iwis.com 3