




Flat Top Chain 879 Series 879, Plastic - FLEXON

Part no.: 81012646 Packaging Unit: 3,048m

Brand: FLEXON Model: Series 879 Surface: Plastic



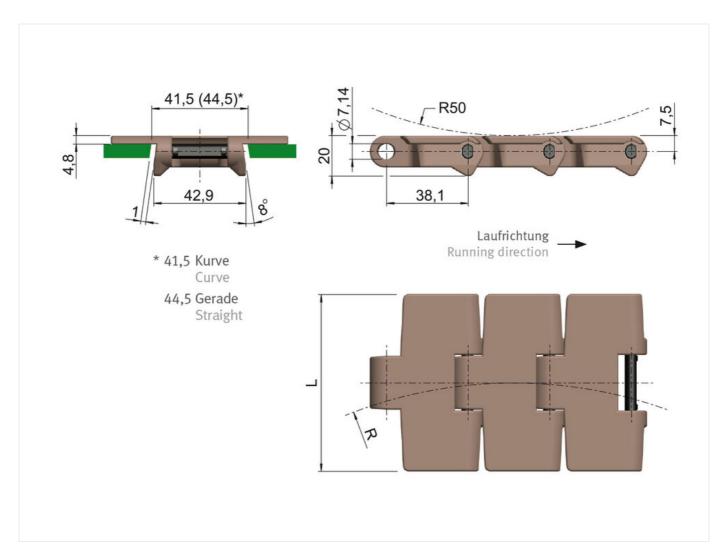

Technical data

| FLAT TOP CHAIN | 879 |
|---------------------------|------|
| Pin diameter d2 max. (mm) | 7,14 |
| Weight per meter (kg) | 1,08 |
| Chain material | LF |

www.iwis.com

Product data



| Pin material | Stainless steel |
|-----------------------------|-----------------|
| Plate thickness (mm) | 4,8 |
| Back flex radius (mm) | 50 |
| Width L (mm) | 114,3 |
| Average breaking load (N) | 6 |
| Minimum Curve radius R (mm) | 500 |

Product Information

FLEXON Plastic Flat Top Chains are produced in straight and side flexing versions and the range is covered by a broad selection of raw materials, chain link profiles and plate thicknesses to provide solutions for all conveying applications. These Flat Top Chains are characterised by low friction co-efficients, high resistance to wear, dampening of noise and high standards of workmanship with very smooth surfaces. The chains can be used in many applications and are not just confined to the Beverage Industry.

Highlights:

- · Thermoplastic POM material with specially dispersed lubricating additives
- · Very balanced relation between low coefficient of friction and high mechanical strength
- · FDA approved
- · High dimension stability
- Working temperatures from -40°C till +80°C (-40°F till +176°F)

Applications

- · Feeding and automation technology
- Food processing industry
- Automotive industry
- Steelmaking industry

REQUEST DIRECTLY ONLINE NOW

https://www.iwis.com/en-en/products-services/flat-top-chain-879-series-879-plastic-flexon~p7180

Useful information

www.iwis.com 2



CALCULATION PROGRAM

InduKet: the Chain Drive Calculation Program for Engineers.

iwis.com/chaincalc

CHAIN CALCULATION

The right drive solution for your challenge.

chaindrive@iwis.com

SERVICES

ChainFinder, CAD data, iwis Chain Handbook and more.

iwis.com/services

www.iwis.com 3